

GPI® List Prices

PUMPS & METERS FOR USE WITH

Fuel/Petroleum & Herbicide/Chemicals

Prices Effective January 1, 2009

Supersedes all previous price lists. Subject to change without notice.

CONFIDENTIAL

PROPRIETARY NOTICE

This document contains proprietary information that is the sole property of GREAT PLAINS INDUSTRIES, INC., to be held and treated by its recipient on a confidential basis and not to be shown or disclosed to any unauthorized organization or person.

TO ORDER BY PHONE, CALL 1-800-835-0113 FAX (316) 686-6746


Table of Contents

BUILD YOUR OWN PUMP SYSTEM	4
★ ★ ★ ★ ★ FUEL GROUP	
EZ-8 Pump	5
Electric Gear Pumps – M-150S, M-180S and M-240S	5-6
Electric Gear Pumps – M-180 Filter (Combos), M-1115S Series and M-150S Pump and FM-530 Meter Combos	6
01 Series Aluminum Electronic Digital Fuel Meters	7
03 Series Aluminum Electronic Digital Fuel Meters	7
LM50 Lube Meters	8
Hand Pumps – HP-90, HP-100, LP-50 and RP-10	9
Fuel and Oil Meters – FM-100, FM-200, LM-200 and LM-300	10
Mechanical Fuel Meters – FM-530 Series	11
★ ★ ★ ★ FUEL GROUP	
Oil Pumps – L 5116, L 5132 and L 5016	12
Petroleum Pumps – P-200, PA-200 and VP12 Series	12
Electric Vane Pumps (25 GPM) – M-3025 Series	13
Electric Vane Pumps (20 GPM & 25 GPM) – M-3120 and M-3425 Series	14
FM-530 Remote Dispenser	15
Electric Vane Pumps (20 GPM) and FM-530 Meter Combos	16
★ ★ ★ FUEL GROUP	
Cabinet Model Fuel Systems – CM-3120 and CM-3220	17
Electric Vane Pumps (30 GPM) – M-3130 Series	18
Electric Vane Pumps (30 GPM) and FM-530 Meter Combos	18
★ ★ FUEL GROUP	
Hand Pumps – BP10, BP12, CP-5 and RP-5	19
★ FUEL GROUP	
Filters and Adapters	20
Hoses	20
Hose & Nozzle Kits	20
Replacement Nozzles	21
Hydraulic Filters	21
Fuel Pump Accessories	21
Overhaul Kits	22
Meter Accessories and Kits	22
★ ★ ★ ★ CHEMICAL GROUP	
Water Meters – 01N, TM Series	23
03N Series Nylon Electronic Digital Meters	23
Plastic Utility Pumps (Herbicide/Chemical) – 12-Volt – P-120H and P-200H	24
Plastic Utility Pumps (Herbicide/Chemical) – 115-Volt – PA-120H and PA-200H	25
Herbicide and Chemical Meters – FM-300H and FM-100H	25
Other Herbicide Pumps – HP-100C, LP-50, M-120H, M-1100H and VP12H	26
★ CHEMICAL GROUP	
Meter Accessories and Kits (Herbicide/Chemical)	27
Pump Kits and Accessories (Herbicide/Chemical)	27



blended fuels

*ABOUT ALTERNATIVE FUELS: Alternative fuels such as alcohol blends and biodiesel blends are becoming more available in the marketplace. Blended fuels are evolving, the processes are improving and blending formulas are changing. GPI is in step with the fuel industry when it comes to use of these alternative fuels. GPI equipment has been tested and approved for use with gasoline (alcohol blends E-15), diesel fuel (biodiesel blends B20) and kerosene. This includes GPI pumps, meters, filters, hoses and nozzles identified in this booklet by the graphic displayed here. Special pumps are required for use with **B100** fuels. Six B100 pumps are included in this booklet.*

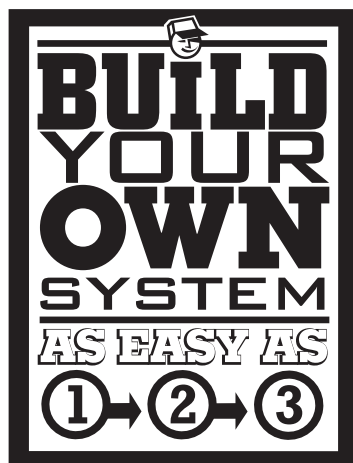

Did you know you can design your own Pump System to fit your unique application? GPI offers a line of products specifically for this purpose. Pieces and parts allow the end user to tailor the pump system for their particular needs. Pick up the M-150S-E shown in the list below. Then start building your own system. It's as easy as 1, 2, 3.

CHOOSE YOUR PUMP



110240-02	M-150S-E	\$ 293.00
	12-volt DC Economy Fuel Pump. This aluminum gear pump delivers 15 GPM and has an Overload Protected Motor. UL Listed. CSA Certified.	



STEP 1

CHOOSE A NOZZLE TO GO WITH YOUR PUMP...

110121-8	3/4" Unleaded Nozzle	\$ 66.04
	Nozzle with automatic shutoff feature.	
110155-1	3/4" Unleaded Nozzle	24.20
	Nozzle with manual shutoff.	

STEP 2

ADD OTHER NECESSARY COMPONENTS...

110532-01	Hose, 3/4" x 14'	\$ 33.44
	With spring and static wire. P.O.P.	
110242-01	Power Cord , 18 ft.	23.64
110241-01	Suction Pipe	33.24
	Adjustable plastic suction pipe, adjusts from 22" to 40".	

STEP 3

CHOOSE ITEMS TO MAKE YOUR PUMP WORK FOR YOU!


110534-01	Filter Adapter	\$ 24.62
	Cast iron.	
129301-01	Filter	14.52
	Filter for particulates (18 GPM).	
129301-02	Filter	23.52
	Filter for water and particulates (18 GPM).	
110533-01	Filter Installation Kit	12.52
	Includes fittings and tape to make filter installation easy between pump and hose.	
113255-20	01A Electronic Meter	186.00
	This lightweight aluminum meter is perfect mounted at the end of the hose. The electronics are powered by two AAA batteries and are easy to replace. The meter is calibrated at the factory for fuel.	
126000-30	FM-530 Mechanical Meter	202.00
	The FM-530 Mechanical Meter fits virtually all mounting applications. This meter has a built-in strainer, an easy-to-read display and push-button reset. The meter is calibrated at the factory for thin viscosity fuels but can be field calibrated as well.	

Electric Gear Pumps




Part No. **Model No./Description** **Suggested List US \$**

137100-01 **EZ-8 Pump**\$ **296.00**
 This 12-volt electric pump delivers 8 GPM (equivalent to standard gas stations). The system comes complete with power cord, manual unleaded nozzle, three-piece, trim-to-fit suction pipe and 10 ft. of 5/8 in. hose. The motor is provided with an internal, auxiliary temperature-limiting device. Motor is UL Listed to U.S. and Canadian safety standards. P.O.P. box. 16 lbs./7.3 kg.



110000-99 **M-150S-MU** **417.00**
 12-volt DC Aluminum Gear Pump for fuel with manual unleaded nozzle. Up to 15 GPM (57 LPM). UL Listed Motor. CSA Certified. Overload Protected Motor. Includes 18 ft. (4.6 m) power cord, 3/4 in. x 12 ft. (3.7 m) hose, and adjustable suction pipe. P.O.P. box. 23.5 lbs./10.7 kg.

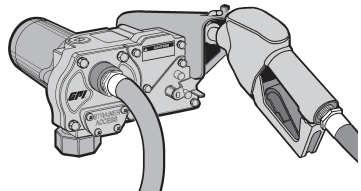

110000-126 **M-150S-B100-MU** **467.00**
 Same pump as above except designed for use with **B100** fuels. Requires minimum operating temperature of 40° for B100.



Automatic nozzle shown

110000-100 **M-150S-AU** **472.00**
 12-volt DC Aluminum Gear Pump for fuel with automatic unleaded nozzle. Up to 15 GPM (57 LPM). UL Listed Motor. CSA Certified. Overload Protected Motor. Includes 18 ft. (4.6 m) power cord, 3/4 in. x 12 ft. (3.7 m) hose, and adjustable suction pipe. P.O.P. box. 24.5 lbs./11.1 kg.




110000-127 **M-150S-B100-AU** **522.00**
 Same pump as above except designed for use with **B100** fuels. Requires minimum operating temperature of 40° for B100.



110000-107 **M-150S-EM** **374.50**
 12-volt DC Economy Version Aluminum Gear Pump for fuel with manual unleaded nozzle. Up to 15 GPM (57 LPM). UL Listed Motor. CSA Certified. Overload Protected Motor. Includes 18 ft. (4.6 m) power cord, 3/4 in. x 10 ft. (3.05 m) hose, and two-piece suction pipe. P.O.P. box. 22.60 lbs./10.3 kg.



110300-1 **M-180S-ML** **482.00**
 High Flow, 12-volt DC Aluminum Gear Pump for fuel with manual leaded nozzle. Delivers up to 18 GPM (68 LPM). UL Listed Motor. CSA Certified. Overload Protected Motor. Includes 18 ft. (4.6 m) power cord, 1 in. x 12 ft. (3.7 m) hose, and adjustable suction pipe. P.O.P. box. 26.5 lbs./12.0 kg.

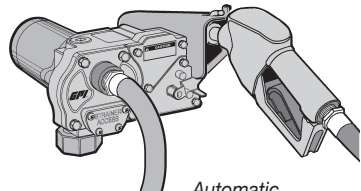


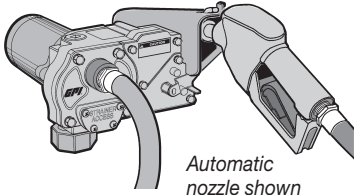




110300-2 **M-180S-AU** **537.00**
 High Flow, 12-volt DC Aluminum Gear Pump for fuel with automatic unleaded nozzle. Delivers up to 18 GPM (68 LPM). UL Listed Motor. CSA Certified. Overload Protected Motor. Includes 18 ft. (4.6 m) power cord, 1 in. x 12 ft. (3.7 m) hose, and adjustable suction pipe. P.O.P. box. 27.7 lbs./12.6 kg.






Automatic nozzle shown



Electric Gear Pumps continued


Part No.	Model No./Description	Suggested List US \$
110612-01	M-180-ML Filter Combo \$ 514.00 This combo special includes the ML-180-ML pump (part number 110300-1) and a GPI filter, filter adapter plus a Filter Installation Kit. This pump and filter combo product makes installation quick and easy. P.O.P. box. 28.9 lbs./13.1 kg.	 
110612-02	M-180-AU Filter Combo 569.00 This combo special includes the ML-180-AU pump (part number 110300-2) and a GPI filter, filter adapter plus a Filter Installation Kit. This pump and filter combo product makes installation quick and easy. P.O.P. box. 30.3 lbs./13.7 kg.	
110000-70	M-240S-MU 526.00 24-volt DC Aluminum Gear Pump for fuel with manual unleaded nozzle. Up to 15 GPM (57 LPM). UL Listed Motor. CSA Certified. Overload Protected Motor (via inline fuse). Includes 18 ft. (4.6 m) power cord, 3/4 in. x 12 ft. (3.7 m) hose, and adjustable suction pipe. P.O.P. box. 23.2 lbs./10.5 kg. <i>Battery Clamp Kit sold separately.</i>	 
110000-81	M-1115S-MU 449.50 115-volt AC Light Duty Aluminum Gear Pump for fuel with manual unleaded nozzle (UL). Up to 12 GPM (45 LPM). System is UL Listed, CSA Certified Pump and Overload Protected Motor. Includes 3/4 in. x 12 ft. (3.7 m) hose (UL), and adjustable suction pipe. P.O.P. box. 21.7 lbs./9.8 kg.	
110000-82	M-1115S-AU 504.50 Same pump as above with automatic unleaded nozzle. 22.3 lbs./10.15 kg.	

Electric Gear Pump and Meter Combos

Part No.	Model No./Description	Suggested List US \$
110610-1	M-150S-MU / FM-530-G6N \$ 610.00 12-volt DC Fuel System with M-150S Electric Gear Pump with manual unleaded nozzle and FM-530 Mechanical Fuel Meter calibrated in gallons with 3/4 inch NPT outlet. Motor is UL Listed and CSA Certified. Meter is UL Listed. Customer assembles meter to pump. Also includes 18 ft. (4.6 m) power cord, 3/4 in. x 12 ft. (3.7 m) hose, and adjustable suction pipe. P.O.P. box. 28.5 lbs./12.9 kg.	 
110610-2	M-150S-MU / FM-530-L6N 610.00 Same system as above calibrated in litres. 29.1 lbs./13.2 kg.	
110610-3	M-150S-AU / FM-530-G6N 665.00 12-volt DC Fuel System with M-150S Electric Gear Pump with automatic unleaded nozzle and FM-530 Mechanical Fuel Meter calibrated in gallons with 3/4 inch NPT outlet. Motor is UL Listed and CSA Certified. Meter is UL Listed. Customer assembles meter to pump. Also includes 18 ft. (4.6 m) power cord, 3/4 in. x 12 ft. (3.7 m) hose, and adjustable suction pipe. P.O.P. box. 29.1 lbs./13.2 kg.	
110610-4	M-150S-AU / FM-530-L6N 665.00 Same system as above calibrated in litres. 29.3 lbs./13.3 kg.	


01 Series Aluminum Electronic Digital Fuel Meters

Part No.	Model No./Description	Suggested List US \$
113255-1	01A31GM Aluminum Turbine Meter with LCD readout for gallons with 1 inch NPT threads. 3 to 30 GPM (10 to 100 LPM). AAA field replaceable batteries. Only Factory Calibrated for fuel. 300 PSIG/20.7 bar. P.O.P. packaging. 1.5 lbs./0.7 kg.	\$ 186.00
113255-2	01A31LM Same meter as above except calibrated for litres.	186.00



03 Series Aluminum Electronic Digital Fuel Meters

Part No.	Model No./Description	Suggested List US \$
113900-9500	03A30GM Aluminum Turbine Meter with LCD readout for gallons and litres with 1 inch NPT threads. 0.3 to 3 GPM (1 to 10 LPM). Field replaceable lithium batteries. Factory and Field Calibration. 300 PSIG/20.7 bar. 1.3 lbs./0.6 kg.	\$ 430.00
113900-9501	03A31GM Aluminum Turbine Meter with LCD readout for gallons and litres with 1 inch NPT threads. 3 to 50 GPM (10 to 190 LPM). Field replaceable lithium batteries. Factory and Field Calibration. 300 PSIG/20.7 bar. 1.3 lbs./0.6 kg.	423.00
113900-9502	03A32GM Aluminum Turbine Meter with LCD readout for gallons and litres with 2 inch NPT threads. 30 to 300 GPM (100 to 1,000 LPM). Field replaceable lithium batteries. Factory and Field Calibration. 300 PSIG/20.7 bar. 3.0 lbs./1.4 kg.	932.00



All 03 Series Meters are suitable for use in the European Community (CE). The 03 Series Meters are FM Approved. UL Listed to Canadian safety standards and DEMKO Certified.

Contact Factory for Optional Protective Meter Covers and the Standard Remote Kit

The protective covers guard against scratches and breakage:

113265-1	Standard Remote Assembly
906004-85	EDM Cover Single Access Port
906004-86	EDM Cover Dual Access Port

Key to Model Number Extensions and Common Abbreviations

Order with the full Model Numbers and we'll know exactly what you want!



AL	Automatic Leaded Nozzle included	L8B	litre, 1 inch, BSPP threads	PO	This is a pump only – doesn't include hose & nozzle
AU	Automatic Unleaded Nozzle included	L12B	litre, 1-1/2 inch, BSPP threads	P.O.P.	4- or 2-color Point of Purchase packaging
BV	Ball Valve Nozzle included	L6N	litre, 3/4 inch, NPT threads	UL	The product is UL Listed
CE	European Community Version	L8N	litre, 1 inch, NPT threads	6	3/4 inch
G6N	Gallon, 3/4 inch, NPT threads	L12N	litre, 1-1/2 inch, NPT threads	8	1 inch
G8N	Gallon, 1 inch, NPT threads	ML	Manual Leaded Nozzle included	12	1-1/2 inch
G12N	Gallon, 1-1/2 inch, NPT threads	MU	Manual Unleaded Nozzle included		
L6B	litre, 3/4 inch, BSPP threads	NUL	The product is not UL Listed		

Lube Meters


Part No. Model No./Description Suggested List US \$

*These Lube Meters are ideal for use with:
Engine oils, transmission fluid or antifreeze.*

LM50DN	Lube Meter Electronic Digital meter is a battery operated meter with 6-digit display showing Batch, Reset Total, Non-Reset Total and Flow-rate. Rugged construction with protective boot for display. Flowrate is 0.26 to 7.8 GPM (1 to 30 LPM). Includes 1/2 inch NPT inlet fitting.	\$ 297.00
LM50DB	Lube Meter Electronic Digital meter is a battery operated meter with 6-digit display showing Batch, Reset Total, Non-Reset Total and Flow-rate. Rugged construction with protective boot for display. Flowrate is 0.26 to 7.8 GPM (1 to 30 LPM). Includes 1/2 inch BSPT inlet fitting.	297.00
LM50PN	Lube Meter Pulse output meter with Reed Switch or Hall Effect pulse output. Rugged construction is fully sealed for long life and dependability. Flowrate is 0.26 to 7.8 GPM (1 to 30 LPM). Includes 1/2 inch NPT inlet fitting.	234.00
LM50PB	Lube Meter Pulse output meter with Reed Switch or Hall Effect pulse output. Rugged construction is fully sealed for long life and dependability. Flowrate is 0.26 to 7.8 GPM (1 to 30 LPM). Includes 1/2 inch BSPT inlet fitting.	234.00












LM50MNG	Lube Meter Mechanical high pressure, positive displacement inline meter. Flowrate is 0.26 to 7.8 GPM (1 to 30 LPM). Includes 1/2 inch NPT fitting. Calibrated in gallons.	297.00
LM50MNL	Lube Meter Same meter as above except calibrated for litres.	297.00
LM50MBG	Lube Meter Mechanical high pressure, positive displacement inline meter. Flowrate is 0.26 to 7.8 GPM (1 to 30 LPM). Includes 1/2 inch BSPT fitting. Calibrated in gallons.	297.00
LM50MBL	Lube Meter Same meter as above except calibrated for litres.	297.00
LM50MNQ	Lube Meter Mechanical high pressure, positive displacement inline meter. Flowrate is 0.26 to 7.8 GPM (1 to 30 LPM). Includes 1/2 inch NPT fitting. Calibrated in quarts.	297.00
LM50MBQ	Lube Meter Mechanical high pressure, positive displacement inline meter. Flowrate is 0.26 to 7.8 GPM (1 to 30 LPM). Includes 1/2 inch BSPT fitting. Calibrated in quarts.	297.00



Hand Pumps




Part No.	Model No./Description	Suggested List US \$	
131000-1	HP-90 Economical Piston Hand Pump for use with fuel. This pump fits a 2 inch NPT bung. Includes 3/4 in. x 8 ft. (2.4 m) hose, molded plastic nozzle, built-in nozzle hanger and two-piece suction pipe. P.O.P. box. 12.4 lbs./5.6 kg.	\$ 153.00	 
114000-5	HP-100-NUL Dual-Flo® Piston Hand Pump for use with fuel. This pump fits a 2 inch NPT bung. Includes 3/4 in. x 8 ft. (2.4 m) Buna-N® hose, thermoplastic nozzle, and adjustable suction pipe. P.O.P. box. 13.2 lbs./6.0 kg.	188.00	 
114000-10	HP-100-UL Same pump as above except with static wire hose and metal spout. 14.0 lbs./6.4 kg.	199.00	
129000-1	LP-50 Use with water, petroleum products and agricultural chemicals. Do not use with kerosene, windshield washer fluid or flammable fluids. This pump fits a 2 inch NPT bung. Includes fluorocarbon and polypropylene parts. Expandable suction pipe for drums up to 36 in. (91 cm) deep. P.O.P. box. 2.7 lbs./1.2 kg.	86.00	 
123000-06	RP-10-UL Rotary Hand Pump with cast iron rotor for fuel. This pump fits a 2 inch NPT bung. UL Listed. Includes 3/4 in. x 8 ft. (2.4 m) Buna-N® hose, metal nozzle, and adjustable suction pipe. P.O.P. box. 17.0 lbs./7.7 kg.	193.00	 

**See page 19 for additional Hand Pumps:
Models BP-10, BP-12, CP-5 and RP-5**



FM-100 Series Mechanical Fuel Meters

Part No.	Model No./Description	Suggested List US \$
111200-18	FM-100-G6N Mechanical Fuel Meter with filter calibrated in gallons with 3/4 inch NPT inlet/outlet. UL Listed. 4 to 20 GPM (15 to 75 LPM). 4-digit display. 50 PSIG/3.4 bar. P.O.P. box. 4.5 lbs./2.0 kg.	\$ 221.00
111200-19	FM-100-L6N Same meter as above calibrated in litres. 4.5 lbs./2.0 kg.	221.00
111200-1	FM-100-G8N Mechanical Fuel Meter with filter calibrated in gallons with 1 inch NPT inlet/outlet. UL Listed. 4 to 20 GPM (15 to 75 LPM). 4-digit display. 50 PSIG/3.4 bar. P.O.P. box. 4.5 lbs./2.0 kg.	240.00
111200-10	FM-100-L8N Same meter as above calibrated in litres. 4.5 lbs./2.0 kg.	240.00




Contact Factory for Optional Filter Assembly

111010-1 Filter Assembly



FM-200 Series Mechanical Fuel Meters

Part No.	Model No./Description	Suggested List US \$
111200-20	FM-200-G6N Mechanical Fuel Meter with strainer calibrated in gallons with 3/4 inch NPT inlet/outlet. UL Listed. 4 to 20 GPM (15 to 75 LPM). 4-digit display. 50 PSIG/3.4 bar. P.O.P. box. 3.5 lbs./1.6 kg.	\$ 202.00
111200-21	FM-200-L6N Same meter as above calibrated in litres. 3.5 lbs./1.6 kg.	202.00
111200-4	FM-200-G8N Mechanical Fuel Meter with strainer calibrated in gallons with 1 inch NPT inlet/outlet. UL Listed. 4 to 20 GPM (15 to 75 LPM). 4-digit display. 50 PSIG/3.4 bar. P.O.P. box. 3.5 lbs./1.6 kg.	221.00
111200-13	FM-200-L8N Same meter as above calibrated in litres. 3.5 lbs./1.6 kg.	221.00







LM Series Oil Meters

Part No.	Model No./Description	Suggested List US \$
111316-01	LM-200-Q8N Mechanical Meter with strainer, factory calibrated for use with hydraulic fluid. Can field calibrate for other fluids like oil and solvent. Flow range is 16 to 80 QPM. Includes 1 inch NPT inlet/outlet. Displays 4 digits in quarts. Great for use with waste oil. Do not use for flammable fluids. 3.3 lbs./1.5 kg.	\$ 221.00
111316-04	LM-200-Q6N Same meter as above except with 3/4 inch NPT inlet/outlet. 3.4 lbs./1.5 kg.	202.00
120000-28	LM-300-Q6N Electronic Disc Meter with a flow range of 8 to 80 QPM. Use with motor oil, gear oil, hydraulic oil, antifreeze (not to exceed 50% water), ATF and waste oil. The maximum display value is 999,999 on the LCD readout. Displays gallons and litres. PBT polyester housing. Inlet/outlet ports are 1 inch NPT. 3.0 lbs./1.4 kg.	285.00



FM-530 Series Mechanical Fuel Meters


Part No.	Model No./Description	Suggested List US \$
126000-19	FM-530-G6N Mechanical Fuel Meter calibrated in gallons with 3/4 inch NPT thread inlet/outlet. UL Listed. 5 to 30 GPM (19 to 114 LPM). Large 4-digit display. Push button reset. 50 PSIG/3.4 bar. P.O.P. box. 6.0 lbs./2.7 kg.	\$ 202.00
	 blended fuels	
126000-21	FM-530-L6N Same meter as above calibrated in litres with 3/4 inch NPT inlet/outlet. 6.0 lbs./2.7 kg.	202.00
126000-20	FM-530-G8N Mechanical Fuel Meter calibrated in gallons with 1 inch NPT thread inlet/outlet. UL Listed. 5 to 30 GPM (19 to 114 LPM). Large 4-digit display. Push button reset. 50 PSIG/3.4 bar. P.O.P. box. 6.0 lbs./2.7 kg.	216.00
	 blended fuels	
126000-23	FM-530-L8N Same meter as above calibrated in litres with 1 inch NPT inlet/outlet. 6.0 lbs./2.7 kg.	216.00
126000-25	FM-530-G12N Mechanical Fuel Meter calibrated in gallons with 1-1/2 inch NPT thread inlet/outlet. UL Listed. 5 to 30 GPM (19 to 114 LPM). Large 4-digit display. Push button reset. 50 PSIG/3.4 bar. P.O.P. box. 6.0 lbs./2.7 kg.	251.00
	 blended fuels	
126000-27	FM-530-L12N Same meter as above calibrated in litres with 1-1/2 inch NPT inlet/outlet. 6.0 lbs./2.7 kg.	251.00





Oil Pumps



Part No.	Model No./Description	Suggested List US \$
142100-01	L 5116 The L 5116 is specifically designed for use with oil. This 115-volt AC pump includes a 1/2 hp thermally protected motor. The L 5116 pumps 16 QPM. Unit includes pump, two-piece suction pipe, 8 ft. of hose, a 90 degree street elbow, 3/8 in. three-prong cord and a ball valve nozzle. 33.7 lbs./15.3 kg.	\$ 350.00
142100-02	L 5132 This pump is specifically designed for use with oil. The 115-volt AC pump includes a 1 hp thermally protected motor. The L 5132 pumps 32 QPM. Unit includes pump, two-piece suction pipe, 8 ft. of hose, a 90 degree street elbow, 3/8 in. three-prong cord and a ball valve nozzle. 43.6 lbs./19.8 kg.	405.00
142100-03	L 5016 This 12-volt electric pump is designed for use with oil. The pump has a 1/2 hp motor. The L 5016 model requires a 50 amp automotive-type fuse that is not supplied. Unit includes pump, two-piece suction pipe, 8 ft. of hose, a 90 degree street elbow and a ball valve nozzle. This pump delivers 16 QPM. 43.4 lbs./19.7 kg.	574.00



Order the portable Cart Kit for your oil pump. See page 21 for details.







Petroleum Pumps


Part No.	Model No./Description	Suggested List US \$
118000-9	P-200-BV 12-volt DC Plastic Gear Pump for up to 30 weight oil. Up to 8 GPM (30 LPM). Includes 15 ft. (4.6 m) power cord, clips, 1 in. x 12 ft. (3.7 m) hose, ball valve nozzle, and adjustable suction pipe. Brown box. 24.5 lbs./11.1 kg.	\$ 535.00
118003-11	PA-200-BV 115-volt AC Plastic Gear Pump for up to 30 weight oil. Up to 8 GPM (30 LPM). Includes grounded, three-prong power connector, 1 in. x 12 ft. (3.7 m) hose, ball valve nozzle, and adjustable suction pipe. Brown box. 23.0 lbs./10.5 kg.	610.00
115100-4	VP12-BV 12-volt DC Plastic Piston Pump for up to 90 weight oil. Up to 8 GPM (30 LPM). Includes 20 ft. (6.1 m) power cord, clips, 1 in. x 12 ft. (3.7 m) hose, ball valve nozzle, and adjustable suction pipe. Brown box. 25.2 lbs./11.4 kg.	762.00





Electric Vane Pumps – 20 GPM




Part No.	Model No./Description	Suggested List US \$
133200-1	M-3120-ML 115-volt AC Vane Pump for fuel with manual leaded nozzle. Delivers up to 20 GPM (76 LPM). Pump and motor are UL Listed to U.S. and Canadian safety standards. 3/4 inch NPT outlet. Includes 3/4 in. x 12 ft. (3.7 m) hose. P.O.P. box. 51.0 lbs./23.1 kg.	\$ 535.50
	 blended fuels	
133200-05	M-3120-B100-ML Same pump as above except designed for use with B100 fuels. Requires minimum operating temperature of 40° for B100.	579.00
	 blended fuels	
133200-2	M-3120-AL 115-volt AC Vane Pump for fuel with automatic leaded nozzle. Delivers up to 20 GPM @ 60 Hz (76 LPM @ 60 Hz). Pump and motor are UL Listed to U.S. and Canadian safety standards. 3/4 inch NPT outlet. Includes 3/4 in. x 12 ft. (3.7 m) hose. P.O.P. box. 52.3 lbs./23.8 kg.	580.25
	 blended fuels	
133200-06	M-3120-B100-AL Same pump as above except designed for use with B100 fuels. Requires minimum operating temperature of 40° for B100.	623.75
	 blended fuels	
133200-03	M-3120-PO 115-volt AC Vane Pump for fuel without hose and nozzle. Includes nozzle cover. Delivers up to 20 GPM @ 60 Hz (76 LPM @ 60 Hz). Pump and motor are UL Listed to U.S. and Canadian safety standards. 3/4 inch NPT outlet. 45.5 lbs./20.6 kg.	500.00
	 blended fuels	
133200-10	M-3120-RDP This pump is specifically designed to work with the FM-530-RD unit. This model does not include hose, nozzle or nozzle hanger. 47.6 lbs./21.6 kg.	510.00
	 blended fuels	




Available Pump Accessories:

133511-01 Cabinet Base Kit (optional)
133515-01 Cabinet Vapor Recover Kit

Electric Vane Pumps – 25 GPM


Part No.	Model No./Description	Suggested List US \$
133260-01	M-3425-ML 24-volt DC Electric Pump for fuel with manual leaded nozzle. Delivers up to 25 GPM (95 LPM). Motor is UL Listed to U.S. and Canadian safety standards. 1 inch NPT outlet. Includes 15 ft. (4.6 m) power cord and 1 in. x 12 ft. (3.7 m) hose. P.O.P. box. 57.5 lbs./26.1 kg.	588.25
	 blended fuels	
133260-02	M-3425-AL 24-volt DC Electric Pump for fuel with automatic leaded nozzle. Delivers up to 25 GPM (95 LPM). Motor is UL Listed to U.S. and Canadian safety standards. 1 inch NPT outlet. Includes 15 ft. (4.6 m) power cord and 1 in. x 12 ft. (3.7 m) hose. P.O.P. box. 59.3 lbs./26.9 kg.	692.25
	 blended fuels	
133260-03	M-3425-PO 24-volt DC Electric Pump only. Delivers up to 25 GPM (95 LPM). Motor is UL Listed to U.S. and Canadian safety standards. 1 inch NPT outlet. Includes 15 ft. (4.6 m) power cord. P.O.P. box. 50.4 lbs./22.9 kg.	571.60
	 blended fuels	
133262-04	M-3425CS-PO 24-volt DC Electric Contractor Special Pump only. Delivers up to 25 GPM (95 LPM). Motor is UL Listed to U.S. and Canadian safety standards. 1 inch NPT outlet. Includes weight centering inlet, check valve and 15 ft. (4.6 m) power cord. 58.5 lbs./26.6 kg.	592.75



FM-530-RD Remote Dispenser



Part No.	Model No./Description	Suggested List US \$
13330002	FM-530-RD FM-530 Meter in a Remote Dispenser. Order this version for gallons. Includes 3/4 inch NPT nozzle with automatic shutoff feature. Fuel hose is 3/4 in. x 12 ft.	\$1,249.00
13330004	FM-530-RD FM-530 Meter in a Remote Dispenser. Order this version for litres. Includes 3/4 inch NPT nozzle with automatic shutoff feature. Fuel hose is 3/4 in. x 12 ft.	1,249.00
13330005	FM-530-RD FM-530 Meter in a Remote Dispenser. Order this version for gallons. Remote Dispenser unit only without hose or nozzle.	1,199.00
13330006	FM-530-RD FM-530 Meter in a Remote Dispenser. Order this version for litres. Remote Dispenser unit only without hose or nozzle.	1,199.00




FM-530-RD Remote Dispenser Accessories:
 133200-10 M-3120-RDP 20 GPM Pump only unit
 133220-05 M-3130-RDP 30 GPM Pump only unit
 13353302 Vacuum Breaker Kit for M-3120
 13353303 Vacuum Breaker Kit for M-3130
 133511-01 Free Standing Cabinet Base
 133533-01 Mounting Shelf Kit

Electric Vane Pump (20 GPM) and FM-530 Meter Combos



Part No.	Model No./Description	Suggested List US \$
133600-01	M-3120-ML / FM-530-G6N 115-volt AC Fuel Combo with M-3120 Vane Pump with manual leaded nozzle and FM-530 Mechanical Fuel Meter calibrated in gallons with 3/4 inch NPT outlet. Pump and motor are UL Listed to U.S. and Canadian safety standards. Meter is UL Listed. Customer assembles meter to pump. Includes 3/4 in. x 12 ft. (3.7 m) hose. 57.0 lbs./25.9 kg.	\$ 702.00
133600-02	M-3120-ML / FM-530-L6N 115-volt AC Fuel Combo with M-3120 Vane Pump with manual leaded nozzle and FM-530 Mechanical Fuel Meter calibrated in litres with 3/4 inch NPT outlet. Pump and motor are UL Listed to U.S. and Canadian safety standards. Meter is UL Listed. Customer assembles meter to pump. Includes 3/4 in. x 12 ft. (3.7 m) hose. 57.0 lbs./25.9 kg.	702.00
133600-03	M-3120-AL / FM-530-G6N 115-volt AC Fuel Combo with M-3120 Vane Pump with automatic leaded nozzle and FM-530 Mechanical Fuel Meter calibrated in gallons with 3/4 inch NPT outlet. Pump and motor are UL Listed to U.S. and Canadian safety standards. Meter is UL Listed. Customer assembles meter to pump. Includes 3/4 in. x 12 ft. (3.7 m) hose. 58.0 lbs./26.3 kg.	746.75
133600-04	M-3120-AL / FM-530-L6N 115-volt AC Fuel Combo with M-3120 Vane Pump with automatic leaded nozzle and FM-530 Mechanical Fuel Meter calibrated in litres with 3/4 inch NPT outlet. Pump and motor are UL Listed to U.S. and Canadian safety standards. Meter is UL Listed. Customer assembles meter to pump. Includes 3/4 in. x 12 ft. (3.7 m) hose. 60.0 lbs./27.2 kg.	746.75
133600-05	M-3120-PO / FM-530-G6N 115-volt AC Fuel Combo with M-3120 Vane Pump without hose and nozzle. FM-530 Mechanical Fuel Meter is calibrated in gallons with 3/4 inch NPT outlet. Pump and motor are UL Listed to U.S. and Canadian safety standards. Meter is UL Listed. Customer assembles meter to pump. 51.0 lbs./23.1 kg.	666.50
133600-06	M-3120-PO / FM-530-L6N 115-volt AC Fuel Combo with M-3120 Vane Pump without hose and nozzle. FM-530 Mechanical Fuel Meter is calibrated in litres with 3/4 inch NPT outlet. Pump and motor are UL Listed to U.S. and Canadian safety standards. Meter is UL Listed. Customer assembles meter to pump. 50.4 lbs./22.9 kg.	666.50




Order Vane Pump Accessories to make installation easy:

133170-01	Pedestal Kit	121231-1	Tank Adapter, 2 in. x 1 in. FNPT
133514-01	Pump Vapor Recovery Kit		

Cabinet Model Fuel Systems

Part No.	Model No./Description	Suggested List US \$
133604-01	CM-3120 115-volt AC Cabinet Model includes the M-3120 Pump, up to 20 GPM (76 LPM), with a 3/4 inch NPT hose connection. Mechanical Meter is calibrated in gallons . Includes tank adapter. Order hose and nozzle separately. 77.7 lbs./35.3 kg	\$ 793.95
133604-02	CM-3120 115-volt AC Cabinet Model includes the M-3120 Pump, up to 20 GPM (76 LPM), with a 3/4 inch NPT hose connection. Mechanical Meter is calibrated in litres . Includes tank adapter. Order hose and nozzle separately. 77.0 lbs./35.0 kg	793.95
133604-04	CM-3220 230-volt AC Cabinet Model includes the M-3220 pump with 3/4 inch NPT hose connection. Mechanical Meter calibrated in gallons . The pump delivers 20 GPM @ 60 Hz or 17 GPM @ 50Hz. Motor is UL Listed to U.S. and Canadian safety standards. Includes tank adapter. Order hose and nozzle separately. 78.5 lbs./35.6 kg.	829.95
133604-05	CM-3220 230-volt AC Cabinet Model includes the M-3220 pump with 3/4 inch NPT hose connection. Mechanical Meter calibrated in litres . The pump delivers 20 GPM @ 60 Hz or 17 GPM @ 50Hz. Motor is UL Listed to U.S. and Canadian safety standards. Includes tank adapter. Order hose and nozzle separately. 79.5 lbs./36.0 kg.	829.95




Available Pump Accessories:
 133511-01 Cabinet Base Kit (optional)
 133515-01 Cabinet Vapor Recover Kit




Electric Vane Pumps - 30 GPM

Part No.	Model No./Description	Suggested List US \$
133220-1	M-3130-ML 115-volt AC Vane Pump for fuel with manual leaded nozzle. Delivers up to 30 GPM (113 LPM). Pump is UL Listed to U.S. and Canadian safety standards. Motor is UL Listed and CSA Certified. 1 inch NPT outlet. Includes 1 in. x 12 ft. (3.7 m) hose. P.O.P. box. 76.7 lbs./34.8 kg.	\$ 898.00
133220-2	M-3130-AL 115-volt AC Vane Pump for fuel with automatic diesel nozzle. Delivers up to 30 GPM (113 LPM). Pump is UL Listed to U.S. and Canadian safety standards. Motor is UL Listed and CSA Certified. 1 inch NPT outlet. Includes 1 in. x 12 ft. (3.7 m) hose. P.O.P. box. 78.9 lbs./35.8 kg.	997.00
133220-03	M-3130-PO 115-volt AC Vane Pump for fuel without hose or nozzle. Delivers up to 30 GPM (113 LPM). Pump is UL Listed to U.S. and Canadian safety standards. Motor is UL Listed and CSA Certified. 1 inch NPT outlet. P.O.P. box. 68.7 lbs./31.2 kg.	868.00
133220-05	M-3130-RDP This pump is specifically designed to work with the FM-530-RD unit. This model does not include hose, nozzle or nozzle hanger. 66.3 lbs./30.1 kg.	878.00








Electric Vane Pump (30 GPM) and FM-530 Meter Combos

Part No.	Model No./Description	Suggested List US \$
133601-01	M-3130-ML / FM-530-G8N 115-volt AC Fuel Combo with manual leaded nozzle and FM-530 Mechanical Fuel Meter calibrated in gallons with 1 inch NPT outlet. Pump is UL Listed to U.S. and Canadian safety standards. Motor is UL Listed and CSA Certified. Meter is UL Listed. Customer assembles meter to pump. Includes 1 in. x 12 ft. (3.7 m) hose. 82.3 lbs./37.4 kg.	\$ 1,047.00
133601-02	M-3130-ML / FM-530-L8N Same combo as above calibrated for litres. 82.0 lbs./37.2 kg.	1,047.00
133601-03	M-3130-AL / FM-530-G8N 115-volt AC Fuel Combo with automatic diesel nozzle and FM-530 Mechanical Fuel Meter calibrated in gallons with 1 inch NPT outlet. Pump is UL Listed to U.S. and Canadian safety standards. Motor is UL Listed and CSA Certified. Meter is UL Listed. Customer assembles meter to pump. Includes 1 in. x 12 ft. (3.7 m) hose. 84.1 lbs./38.1 kg.	1,146.00
133601-04	M-3130-AL / FM-530-L8N Same combo as above calibrated for litres. 84.1 lbs./38.1 kg.	1,146.00
133601-05	M-3130-PO / FM-530-G8N 115-volt AC Fuel Combo without hose and nozzle. FM-530 Mechanical Fuel Meter is calibrated in gallons with 1 inch NPT outlet. Pump is UL Listed to U.S. and Canadian safety standards. Motor is UL Listed and CSA Certified. Meter is UL Listed. Customer assembles meter to pump. 73.0 lbs./33.1 kg.	1,017.00
133601-06	M-3130-PO / FM-530-L8N Same combo as above calibrated for litres. 73.0 lbs./33.1 kg.	1,017.00

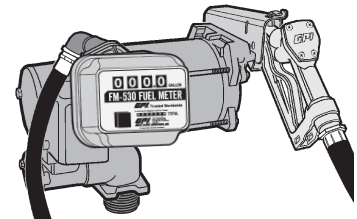

Hand Pumps (Special Items)



Part No.	Model No./Description	blended fuels	
129020-1	BP-10 Plunger Handle Barrel Pump for petroleum products. 2 inch NPT and Buttress thread connections. 3/4 inch curved polyethylene spout screws off for garden hose attachment. P.O.P. box. 3.6 lbs./1.6 kg.		
129010-1	BP-12 Lever Handle Barrel Pump for petroleum products. 2 inch NPT and Buttress thread connections. 3/4 inch metal spout and telescoping suction pipe included. P.O.P. box. 3.6 lbs./1.6 kg.		
129002-1M12	CP-5 Container Pump is lightweight PVC for portability. No special tools – just tighten into a 5-gallon pail. Each pump comes in a poly bag, 12 pumps per carton. 9.0 lbs./4.1 kg. per carton.		
129003-1	RP-5 Rotary Hand Pump for diesel fuel, kerosene and light-weight or medium weight oils. This pump fits a 2 inch NPT bung. Comes complete, includes adjustable spout, easy spin handle and three-piece suction pipe. Installs in minutes. P.O.P. box. 13.0 lbs./6.0 kg.		

Contact factory for pricing on these Special Items.



Filters and Adapters

Part No.	Model No./Description	Suggested List US \$
110528-01	Filter Installation Kit includes one pipe nipple 3/4" x 4", two pipe bushings and a roll of pipe thread tape in a blister package	\$ 12.62
110528-01M4	Filter Installation Kit Multi-pack (Includes 4 kits per carton), 3.5 lbs/1.6 kg per carton <i>Price per kit</i>	12.62
129300-01	Particulate Filter (18 GPM / 67 LPM) 10 micron, 1 - 12 UNF	14.56
129300-02	Water and Particulate Filter (18 GPM / 67 LPM) 10 micron, 1 - 12 UNF	23.56
129320-01	Particulate Filter (30 GPM / 113 LPM) 10 micron, 1-1/2 - 16 UNF	34.82
129320-02	Water and Particulate Filter (30 GPM / 113 LPM) 10 micron, 1-1/2 - 16 UNF	52.76
129340-01	Particulate Filter (18 GPM / 67 LPM) 10 micron, 1 3/8-12 UNF. Includes Draincock	16.62
129340-02	Particulate Filter (18 GPM / 67 LPM) 10 micron, 1 -12 UNF. Includes Draincock	15.22
129340-04	Bio-Tek® Water and Particulate Filter (18 GPM / 67 LPM) 2 micron, 1 - 12 UNF	43.36
129340-05	Bio-Tek® Water and Particulate Filter (40 GPM / 151 LPM) 2 micron, 1-1/2 - 16 UNF	71.62
129420-01	Cast Iron Adapter, 1 inch NPT for 18 GPM, 1-3/8 - 12 UNF	27.22
133527-01	Filter Kit, includes 3/4 in. NPT cast iron adapter, 10 micron filter and 3/4 in. x 4 in. nipple	42.08
906004-88	Cast Iron Adapter, 1 inch NPT for 18 GPM, 1 - 12 UNF	25.84
906005-67	Aluminum Adapter, 1 inch NPT for 30 and 40 GPM, 1-1/2 - 16 UNF	47.48
906006-52	Cast Iron Adapter, 3/4 inch NPT for 18 GPM - 14 UNF	22.86

Hoses

Part No.	Model No./Description	Suggested List US \$
110049-07	Hose Assembly 3/4 in. x 20 ft. with spring support, UL Listed hose	\$ 72.80
110187-1	Electric Gear Pump Hose Assembly, Buna-N, 3/4 in. x 12 ft. (3.7 m) with static wire	32.70
110523-1	Fuel Hose Kit, 3/4 in. x 12 ft. (3.7 m) with static wire, P.O.P.	33.24
110538-01	B100 Fuel Hose Assembly 3/4 in. x 14 ft. Grounded Hose with spring support, UL Listed hose ...	62.98
110539-01	B100 Fuel Hose Assembly 1 in. x 14 ft. Grounded Hose with spring support, UL Listed hose	100.60
133262-05	Fuel Hose Assembly 1 in. x 20 ft.	80.18
14120107	UL Listed Fuel Hose Assembly, 3/4 in. x 18 ft.	75.96
121036-1	UL Listed Fuel Hose Assembly, 1 inch NPT x 14 ft. with spring, P.O.P.	102.18
110529-01	Hose Kit, 3/4 in. x 14 ft. (4.2 m) with spring and static wire, P.O.P.	34.82
110529-02	Hose Kit, 1 in. x 12 ft. (3.7 m) with static wire, P.O.P.	41.68
110529-03	Hose Kit, 1 in. x 14 ft. (4.2 m) with spring and static wire, P.O.P.	44.84
110532-01	Hose Kit, 3/4 in. x 14 ft. (4.2 m) with spring and static wire	33.44

Hose and Nozzle Kits

Part No.	Model No./Description	Suggested List US \$
114504-3	Hose and Nozzle Kit for HP-100 and RP-10 Series	\$ 31.66
121512-1	Hose and Nozzle Kit for Cabinet Model Vane Pump with Manual Leaded Nozzle with NPT threads and 3/4 in. x 12 ft. (3.7 m) hose	106.52
121512-2	Hose and Nozzle Kit for Cabinet Model Vane Pump with Manual Unleaded Nozzle with NPT threads and 3/4 in. x 12 ft. (3.7 m) hose	106.52
121512-3	Hose and Nozzle Kit for Cabinet Model Vane Pump with Automatic Unleaded Nozzle with NPT threads and 3/4 in. x 12 ft. (3.7 m) hose	152.98
121512-4	Hose and Nozzle Kit for Cabinet Model Vane Pump with Automatic Leaded Nozzle with NPT threads and 3/4 in. x 12 ft. (3.7 m) hose	160.54

Replacement Nozzles

Part No.	Model No./Description	Suggested List US \$
110155-1	Manual Unleaded Nozzle, 3/4 inch NPT for M-150S, M-240S & M-1115S Series	\$ 24.20
110155-1M8	8 Pack - 3/4 in. Manual Unleaded Nozzles NPT in a P.O.P. carton	26.00*
110155-1M14	14 Pack - 3/4 in. Manual Unleaded Nozzles NPT in a P.O.P. carton	26.00*
110155-4	Manual Leaded Nozzle, 1 inch NPT for M-180S	25.64
110155-4M8	8 Pack - 1 in. Manual Leaded Nozzles NPT in a P.O.P. carton	27.44*
110155-4M14	14 Pack - 1 in. Manual Leaded Nozzles NPT in a P.O.P. carton	27.44*
110121-8	Automatic Unleaded Nozzle, 3/4 inch NPT, straight spout, P.O.P. packaging for M-150S, M-180S, M-240S & M-1115S Series	66.04
110121-8M12	12 Pack - 3/4 in. Automatic Unleaded Nozzles in a P.O.P. carton	69.20*
110376-01	Automatic Diesel Nozzle, 1 inch NPT, for use with diesel fuel only. Designed for pumps with a minimum flowrate of 20 GPM	75.96
110376-01M12	Automatic Diesel Nozzle, 1 inch - in a 12 pack	73.86*
906001-6	Manual Leaded Nozzle, 3/4 inch NPT with straight spout for M-3120 pump	70.14
906001-10	Manual Leaded Nozzle, 1 inch NPT with straight spout for M-3130 pump	73.38
906004-98	Automatic UL Listed Leaded Nozzle, 3/4 inch NPT with curved spout for M-3120 pump	97.50
906005-1	Automatic Diesel Nozzle, 1 inch NPT, UL Listed, w/curved spout for M-3025 & M-3130 pump	108.48

* Price per nozzle

GROUP



Hydraulic Filters

Part No.	Model No./Description	Suggested List US \$
129922-01	Hydraulic Filter - 10 micron	\$ 14.78
129923-01	Hydraulic Filter - 25 micron	14.78

Fuel Pump Accessories

Part No.	Model No./Description	Suggested List US \$
110244-02	Adjustable Suction Pipe, metal, 21-3/4 to 39-1/2 in. (56 to 100 cm)	\$ 32.66
110100-1	Adjustable Suction Pipe, plastic, 22 to 40 in. (56 to 102 cm)	32.66
110527-1	Battery Clamp Kit	10.98
133263-01	Heavy Duty Battery Clamps	22.04
110902-1	Nozzle Cover Kit for M-150-EM pump	14.28
110905-1	Shear Key Kit includes shear key for any gear pump	6.90
110909-1	Bung Adapter Kit includes 2 inch NPT bung adapter, P.O.P. packaging	27.18
110910-02	Switch Kit	17.44
110929-01	Power Cord Kit, 22 ft., 12/2 AWG	32.18
115527-2	Suction Pipe Extension Kit, 15 in. (38 cm) for suction pipe above. 55 in. (140 cm) total length	44.32
121231-1	Tank Adapter, 2 in. x 1 in. FNPT	28.48
121231-5	Tank Adapter, 2 in. x 1-1/4 in. FNPT	27.44
133170-01	Pedestal Assembly, NPT	168.80
133511-01	Cabinet Base Assembly	237.50
133514-01	Pump Vapor Recover Kit	105.48
133515-01	Cabinet Vapor Recovery Kit	111.84
133533-01	Mounting Shelf Kit for the FM-530 Remote Dispenser unit	110.78
13353302	Vacuum Breaker Kit for the M-3120 Electric Pump (20 GPM Pump)	95.32
13353303	Vacuum Breaker Kit for the M-3130 Electric Pump (30 GPM Pump)	99.00
142102-01	Portable cart fits any of the three GPI Oil Pumps. This kit includes a portable, rolling cart, handle with grip, 3/4 inch x 12 ft. hose and suction wand. Hitch and clevis pins are included	380.00
906001-4	Pressure Vent Cap Assembly	43.76
906004-62	Replacement Cap for Vent Cap Assembly (Above)	27.72
906004-62M6	Vent Cap - Replacement Cap in a 6-pack	27.44



Overhaul Kits


Part No.	Model No./Description	Suggested List US \$
114505-2	Overhaul Kit for HP-100 Pump Hand includes piston ring, three seals, packing seals and liner. P.O.P. packaging	\$ 64.24
123503-1	Overhaul Kit for RP-10 Rotary Hand Pump includes vanes, springs, O-rings and gasket	83.98
110504-1	Conversion & Overhaul Kit includes two gears, the drive key and replacement seals for the gear cover, motor shaft (use motor shaft seal to convert existing pump to B100 compatible), poppet, strainer and switch coverplate. P.O.P. packaging	50.24
110906-03	B100 Shaft Seal Conversion Kit includes shaft seal required to convert GPI Gear Pumps for use with B100. Requires minimum operating temp. of 40° for B100. P.O.P. packaging	25.54
133501-1	Vane Kit includes shaft key, eight 1.25 in. vanes and one seal	58.90
133502-1	Vane Kit includes shaft key, eight 2 in. vanes and one seal	106.02
133504-1	Seal Kit includes four replacement seals	20.06
133503-1	Shaft Seal Kit includes retaining ring, shaft seal and spacer washer	51.74
133503-02	Shaft Seal Kit includes shaft seal, retaining ring and spacer washer required to convert GPI Vane Pumps for use with B100. Requires minimum operating temp. of 40° for B100	72.80
13750005	Overhaul Kit for EZ-8 includes motor shaft key, two gears and replacement seals	18.80

Meter Accessories and Kits

Part No.	Model No./Description	Suggested List US \$
126509-1	FM-530 Series Seal Kit includes two fitting O-rings and a housing O-ring	\$ 9.90
126517-01	Pulser Kit for MD-130 or FM-530, 115-volt AC	377.70
126142-01	Bracket for Western Electronics Pulser Kit	36.92
111506-1	FM-100 Series Overhaul Kit includes replacement seals and O-rings	40.94
111506-2	FM-200 Series Overhaul Kit includes replacement seals and O-rings	36.02
111501-1	FM-100 & FM-200 Series Meter Mount Kit includes 3/4 in. nipple & 1 in. to 3/4 in. bushings	22.54
111010-1	FM-100 Series Filter Element	11.66
133530-01	FM-530-RD Junction Box Assembly Kit	87.56
113520-1	Model 03 Meter Battery Replacement Kit includes two lithium batteries	37.36
901002-52	Model 01 and 03 Meter O-ring for sealing the computer to the turbine housing	9.50
116000-1	Large Calibration Container - 5 gallons	84.70
906004-85	Computer Cover - Single Access Port	13.60
906004-86	Computer Cover - Dual Access Port	13.60


Water Meters

Part No.	Model No./Description	Suggested List US \$
113255-4	01N31GM Nylon Turbine Water Meter calibrated in gallons with NPT threads. 3 to 30 GPM. AAA field replaceable batteries. Automatic ON/OFF. Only factory calibrated for water. 1 inch NPT threads. 150 PSIG/10.3 bar. 1.0 lb./0.5 kg.	\$ 186.00
113255-5	01N31LM Same meter as above calibrated in litres with NPT threads. 10 to 100 LPM. 1.0 lb./0.5 kg.	186.00
113255-6	01N12LM Same meter as above calibrated in litres with ISO threads. 10 to 100 LPM. 1.0 lb./0.5 kg.	186.00




CHEMICAL PRODUCTS

TM050	PVC Water Meter 1/2 inch with 1 to 10 GPM. LCD readout. Field replaceable batteries. Totalization and Rate of Flow. Slip Fitting - Schedule 40 Soc. 0.8 lbs./0.3 kg.	297.00
TM050-N	Same meter as above with NPT threads.	
TM075	PVC Water Meter 3/4 inch with 2 to 20 GPM. LCD readout. Field replaceable batteries. Totalization and Rate of Flow. Slip Fitting - Schedule 40 Soc. 0.8 lbs./0.4 kg.	340.00
TM075-N	Same meter as above with NPT threads.	
TM100	PVC Water Meter 1 inch with 5 to 50 GPM. LCD readout. Field replaceable batteries. Totalization and Rate of Flow. Slip Fitting - Schedule 40 Soc. 0.8 lbs./0.4 kg.	385.00
TM100-N	Same meter as above with NPT threads.	
TM150	PVC Water Meter 1-1/2 inch with 10 to 100 GPM. LCD readout. Field replaceable batteries. Totalization and Rate of Flow. Slip Fitting - Schedule 40 Soc. 1.4 lbs./0.6 kg.	428.00
TM150-N	Same meter as above with NPT threads.	
TM200	PVC Water Meter 2 inch with 20 to 200 GPM. LCD readout. Field replaceable batteries. Totalization and Rate of Flow. Slip Fitting - Schedule 40 Soc. 1.6 lbs./0.7 kg.	460.00
TM200-N	Same meter as above with NPT threads.	






03N Series Nylon Electronic Digital Meters

Part No.	Model No./Description	Suggested List US \$
113900-9510	03N30GM Nylon Turbine Meter for 0.3 to 3 GPM (1 to 10 LPM). LCD readout. Displays gallons and litres. Field replaceable batteries. Factory and Field Calibration. 1 inch NPT. 150 PSIG/10.3 bar. 1.0 lbs./0.5 kg.	\$ 419.00
	03N30LM Order 113900-9510	
113900-9511	03N31GM Nylon Turbine Meter for 3 to 50 GPM (10 to 190 LPM). LCD readout. Displays gallons and litres. Field replaceable batteries. Factory and Field Calibration. 1 inch NPT. 150 PSIG/10.3 bar. 1.0 lbs./0.5 kg.	399.00
	03N31LM Order 113900-9511	



12-Volt Plastic Utility Pumps

Part No.	Model No./Description	Suggested List US \$
118000-1	P-120H-2UR 12-volt DC Plastic Gear Pump for thin fluids. Flow range up to 12 GPM (45 LPM). Includes 15 ft. (4.6 m) power cable, clips and tank bung adapter. 2 inch NPT union ring tank mount. Fits 2 inch bung. Order hose, nozzle, and suction pipe separately. See kit below. 17.0 lbs./7.7 kg.	\$ 564.00
118201-1	P-120H-4SC Same pump as above with 4 inch spin collar mount. Order 4 inch tank bung adapter separately. See kit below. 17.0 lbs./7.7 kg.	629.00
118000-2	P-200H-2UR 12-volt Plastic Gear Pump for medium/thick fluids. Flow range up to 8 GPM (30 LPM). Includes 15 ft. (4.6 m) power cable, clips and tank bung adapter. 2 inch NPT union ring tank mount. Fits 2 inch bung. Order hose, nozzle, and suction pipe separately. P.O.P. label. See kit below. 17.0 lbs./7.7 kg.	659.00
118201-2	P-200H-4SC Same pump as above with 4 inch spin collar mount. Order 4 inch tank bung adapter separately. See kit below. 17.0 lbs./7.7 kg.	709.00
118602-9	P-120H-TAP 12-volt Plastic Gear Pump for thin fluids in Tote-A-Pump cage assembly. Includes suction hose. Order discharge hose, nozzle and meter separately. 25.8 lbs./11.7 kg.	703.00
118602-10	P-200H-TAP 12-volt Plastic Gear Pump for medium/thick fluids in Tote-A-Pump cage assembly. Includes suction hose. Order discharge hose, nozzle and meter separately. 25.8 lbs./11.7 kg.	805.00
111502-2	HK-502-BV  Herbicide Kit includes 1 in. x 12 ft. (3.7 m) EPDM hose, ball valve nozzle, and 22 to 40 in. (56 to 102 cm) adjustable suction pipe. P.O.P. label. 8.1 lbs./3.7 kg.	108.00



Key to Model Number Extensions and Common Abbreviations


Order with the full Model Numbers and we'll know exactly what you want!

2TC = 2 inch Tank Connection with no ring or collar
2UR = 2 inch Union Ring Inlet
4SC = 4 inch Spin Collar Inlet
BV = Ball Valve Nozzle included
G = Gallon Calibration
G8N = Gallon, 1 inch Inlet and Outlet, NPT threads
L = Litre Calibration


L8B = Litre, 1 inch Inlet and Outlet, BSPP threads
L8N = Litre, 1 inch Inlet and Outlet, NPT threads
P12 = P-120H Pump Component
P20 = P-200H Pump Component
TAP = Pump comes in a Tote-A-Pump cage assembly

115-Volt Plastic Utility Pumps

Part No.	Model No./Description	Suggested List US \$
118003-1	PA-120H-2UR 115-volt AC Plastic Gear Pump for thin fluids. Flow range up to 12 GPM (45 LPM). Includes grounded, three-prong power connector pigtail and tank bung adapter. 2 inch NPT union ring tank mount. Fits 2 inch bung. Order hose, nozzle, and suction pipe separately. See kit on page 22. 15.0 lbs./6.8 kg.	\$ 755.00
118003-3	PA-120H-4SC Same pump as above with 4 inch spin collar mount. Order 4 inch tank bung adapter separately. See kit on page 22. 15.0 lbs./6.8 kg.	775.00
118003-2	PA-200H-2UR 115-volt Plastic Gear Pump for medium/thick fluids. Flow range up to 8 GPM (30 LPM). Includes grounded, three-prong power connector pigtail and tank bung adapter. 2 inch NPT union ring tank mount. Fits 2 inch bung. Order hose, nozzle, and suction pipe separately. See kit on page 22. 15.0 lbs./6.8 kg.	745.00
118003-4	PA-200H-4SC Same pump as above with 4 inch spin collar mount. Order 4 inch tank bung adapter separately. See kit on page 22. 15.0 lbs./6.8 kg.	815.00





118602-11	PA-120H-TAP 115-volt Plastic Gear Pump for thin fluids in Tote-A-Pump cage assembly. Includes suction hose. Order discharge hose, nozzle, and meter separately. See kit on page 22. 24.0 lbs./10.9 kg.	975.00
118602-12	PA-200H-TAP 115-volt Plastic Gear Pump for medium/thick fluids in Tote-A-Pump cage assembly. Includes suction hose. Order discharge hose, nozzle, and meter separately. See kit on page 22. 24.9 lbs./10.9 kg.	995.00



Herbicide and Chemical Meters

Part No.	Model No./Description	Suggested List US \$
120000-1	FM-300H-G8N Electronic Disc Meter in flow range 2 to 20 GPM (7 to 75 LPM) with LCD readout. Displays gallons and litres. PBT polyester housing. 1 inch NPT inlet and outlet ports. 50 PSIG/3.4 bar. P.O.P. label. 3.0 lbs./1.4 kg. FM-300H-L8N Order 120000-2 (Canadian only)	\$ 290.00
111200-7	FM-100H-G8N Mechanical Herbicide Meter with strainer calibrated in gallons with NPT threads. Aluminum housing. 4 to 20 GPM. 1 inch NPT inlet and outlet ports. 50 PSIG/3.4 bar. 4.0 lbs./1.8 kg.	250.00
111200-16	FM-100H-L8N Same meter as above calibrated in litres with NPT threads. 15 to 75 LPM. 4.0 lbs./1.8 kg.	250.00
111200-17	FM-100H-L8B Same meter as above calibrated in litres with BSPP threads. 15 to 75 LPM. 4.0 lbs./1.8 kg.	250.00




CHEMICAL PRODUCTS




Other Herbicide Pumps

Part No. Model No./Description Suggested List US \$


114000-11 HP-100C-2TC 278.00
 Dual-Flo® Aluminum Piston Hand Pump for medium fluids. Includes 3/4 in. x 8 ft. (2.4 m) EPDM hose, thermoplastic nozzle and 22 to 40 inch (56 to 102 cm) adjustable suction pipe. Fits 2 inch NPT bung. 15.4 lbs./7.0 kg.



129000-1 LP-50 \$ 86.00
 Use with water, petroleum products and agricultural chemicals. Do not use with kerosene, windshield washer fluid or flammable fluids. This pump fits a 2 inch NPT bung. Includes fluorocarbon and polypropylene parts. Expandable suction pipe for drums up to 36 in. (91 cm) deep. P.O.P. box. 2.7 lbs./1.2 kg.




110000-97 M-120H-2UR 490.00
 12-volt DC Aluminum Gear Pump for thin fluids. Includes 20 ft. (6.1 m) battery cable, clips and tank bung adapter. Fits 2 inch NPT bung. Order hose, nozzle and suction pipe separately. (See kit on page 22). 15.6 lbs./6.9 kg.



110000-85 M-1100H-2UR 570.00
 115-volt AC Aluminum Gear Pump for thin fluids. Includes 115-volt pigtail wire only. Fits 2 inch NPT bung. Order hose, nozzle and suction pipe separately. (See kit on page 22). 13.6 lbs./6.1 kg.

115100-1 VP12H-2UR 950.00
 12-volt DC Vertical Plastic Piston Pump for thick fluids. Includes 20 ft. (6.1 m) battery cable, clips and tank bung adapter. Fits 2 inch NPT bung. 20.0 lbs./9.0 kg. Order hose, nozzle and suction pipe separately. (See kit on page 22)





Meter Accessories and Kits

Part No.	Model No./Description	Suggested List US \$
116000-1	Large Calibration Container – 5 gallon	\$ 84.70
120500-1	Series FM-300H Overhaul Kit includes O-ring, signal generator, nutator disc, nutator housing, seal and clips	70.86
120501-3	Series FM-300H Battery Cover Kit includes battery cover, gasket and screws	24.88
111507-1	Series FM-100H Overhaul Kit includes seals, washers and screws	55.56
113520-1	Series 03 Meter Battery Replacement Kit includes two lithium batteries	37.36
901002-52	Series 01 and 03 Meter O-ring to seal computer and turbine housings	9.50

Pump Kits and Accessories

Part No.	Model No./Description	Suggested List US \$
111502-2	Herbicide Kit includes hose, ball valve nozzle and adjustable suction pipe for 2 in. bung	\$ 99.00
115090-5	2 inch Bung Adapter Assembly with seals	113.56
115500-4	4 inch self-sealing Bung Adapter for 4 inch spin collar	140.92
118509-3	2 inch Inlet Fitting to convert 4 inch Plastic Utility Pump to 2 inch	86.68
118509-1	4 inch Inlet Fitting to convert 2 inch Plastic Utility Pump to 4 inch	173.84
110100-2	Adjustable Suction Pipe, 22 in. to 40 in. (56 to 102 cm)	50.74
110107-2	Ball Valve Nozzle, Polypropylene, 1 inch	49.50
110905-1	Shear Key Kit includes replacement key for gear pumps	6.90
118501-1	P-120H and PA-120H Gear Kit includes gears and key	50.58
118502-1	P-200H and PA-200H Gear Kit includes gears, wearplates and key	86.06
118503-1	P-120H Overhaul Kit includes motor shaft key, two gears and replacement O-rings	98.68
118504-1	P-200H Overhaul Kit includes motor shaft key, two gears, wearplate and replacement O-rings	118.42
118506-1	P-120H, PA-120H, P-200H and PA-200H Seal Kit includes seals and O-rings	59.02
110904-1	Series M-120H and M-1100H Herbicide Wet Seal Kit includes seals and poppet assembly	50.94
110907-1	Series M-120H and M-1100H Gear Kit includes gears and key	29.70
110501-1	Series M-120H and M-1100H Poppet Kit includes poppet seal, poppet and spring	12.28
114506-2	Series HP-100C Overhaul Kit includes seals, liner and piston ring	128.58
114509-1	Series HP-100C Inlet Cover Kit includes inlet cover, screen and spacer	34.62
110507-1	Tank Adapter Kit, 8 inch	54.46
117034-2	Adapter Assembly, 2 inch Buttress	62.66

Limited Warranty Policy

Great Plains Industries, Inc. 5252 E. 36th Street North, Wichita, KS USA 67220-3205, hereby provides a limited warranty against defects in material and workmanship on all products manufactured by Great Plains Industries, Inc. Manufacturer's sole obligation under the foregoing warranties will be limited to either, at Manufacturer's option, replacing or repairing defective Goods (subject to limitations hereinafter provided) or refunding the purchase price for such Goods theretofore paid by the Buyer, and Buyer's exclusive remedy for breach of any such warranties will be enforcement of such obligations of Manufacturer. The warranty shall extend to the purchaser of this product and to any person to whom such product is transferred during the warranty period.

The following respective warranty periods apply to GPI products:

Two-year warranty applies to GPI Premium fuel and herbicide products.

Products include: 01A, CM-3120, CM-3220, EZ-8, FM-100, FM-100H, FM-200, FM-300H, FM-530, FM-530-RD, HP-90, HP-100, M-120, M-120H, M-150S, M-150S/FM-530 combo, M-180S, M-240S, M-1100H, M-1115S, M-3025, M-3120, M-3120/FM-530 combo, M-3130, M-3130/FM-530 combo, M-3425, PA-120H, PA-200H, PA-200, P-120H, P-200, P200H, RP-10, VP12 and VP12H.

One-year warranty applies to the following GPI Products:

Products include: 01N, 03A, 03N, A1 Meters, G2 Meters, GM Meters, G Series, HP-100C, LM-200, LM-300, LM-50 Lube Meters, Oil Pumps and TM Series Meters.

90-day warranty applies to GPI Economy products.

Products include: BP-10, BP-12, CP-5, LP-50 and RP-5.

The warranty period shall begin on the date of manufacture or from the date of purchase with an original sales receipt. This warranty shall not apply if:

- A. the product has been altered or modified outside the warrantor's duly appointed representative;
- B. the product has been subjected to neglect, misuse, abuse or damage or has been installed or operated other than in accordance with the manufacturer's operating instructions.

To make a claim against this warranty, contact the GPI Customer Service Department at 316-686-7361 or 800-835-0113. Or by mail at:
Great Plains Industries, Inc.
5252 E. 36th St. North
Wichita, KS, USA 67220-3205

The company shall, notify the customer to either send the product, transportation prepaid, to the company at its office in Wichita, Kansas, or to a duly authorized service center. The company shall perform all obligations imposed on it by the terms of this warranty within 60 days of receipt of the defective product.

GREAT PLAINS INDUSTRIES, INC., EXCLUDES LIABILITY UNDER THIS WARRANTY FOR DIRECT, INDIRECT, INCIDENTAL AND CONSEQUENTIAL DAMAGES INCURRED IN THE USE OR LOSS OF USE OF THE PRODUCT WARRANTED HEREUNDER.

The company herewith expressly disclaims any warranty of merchantability or fitness for any particular purpose other than for which it was designed.

This warranty gives you specific rights and you may also have other rights which vary from U.S. state to U.S. state.

Note: In compliance with MAGNUSON MOSS CONSUMER WARRANTY ACT – Part 702 (governs the resale availability of the warranty terms).



5252 East 36th Street North
Wichita, KS USA 67220-3205
TEL: 316-686-7361
FAX: 316-686-6746

GREAT PLAINS INDUSTRIES, INC.

"A Great Plains Ventures Subsidiary"

www.gpi.net

1-800-835-0113